



ADM-1821AP-00A ADM-1821AP-00E

Panel Mount 21.5-inch KVM Extender Integrated LCD Display Monitor



Features


- 21.5" LCD, 1920 x 1080 Resolution
- 5-Wire Resistive Touch or Tempered Glass
- USB Touch Interface via HDMI Transmitter
- NEMA 4/4X Front Bezel
- Black Powder Coated or Stainless-Steel Bezel
- HDMI Via HDMI Transmitter
- Powered by HDMI Transmitter

Specifications

Model Name	ADM-1821AP-00A / ADM-1821AP-00E
LCD Display	
Display Size (Diagonal)	21.5"
Max Resolution	1920 x 1080
Backlight Lifetime (Hours)	50,000 hours
Visual Characteristics	
Colors	16.7 million
Aspect Ratio	16:9
Viewing Angle (V/H)	178° / 178°
Contrast Ratio	1000:1
Brightness	250 nits
Input Interface	
VGA	N/A
DVI	N/A
HDMI	Via HDMI Transmitter
Display Port	N/A
CVBS	N/A
YPbPr	N/A
Touchscreen	
Technology	5-Wire Resistive
Interface	USB via HDMI Transmitter
Driver	Win XP, Win 7, Win10
Front Bezel	
NEMA 4	Black Powder Coated
NEMA 4X	Stainless Steel (Optional)
Power/Thermal Specs	
Power Requirement (Max)	Powered by HDMI Transmitter
Power Consumption (Max)	15 W
Recommended Power Supply	21 W
Heat Dissipation	51 BTU/hr
Physical Information	
Mounting	Panel Mount
Net Weight	20 lbs / 9.07 kg
Dimension (W x H x D)	20.98 x 12.99 x 2.07 inch 533 x 330 x 52.7 mm
Recommended Cutout Dimension (WxH)	19.92 x 12.35 inch 506.0 x 313.7 mm
Environmental	
Operating Temperature	0~50°C (32~122°F), * VHB Version 0~35°C (32~95°F)
Storage Temperature	-20~60°C (-4~140°F)
Humidity	5% to 95% (non-condensing)
Rating	Bezel Meets NEMA 4 / NEMA 4X requirements
Certification	N/A

Dimension Drawing

ADM-1821AP-00A-00E_600A_V2
 Model Name: ADM-1821AP-00A/00E
 Size Unit: inch(mm)

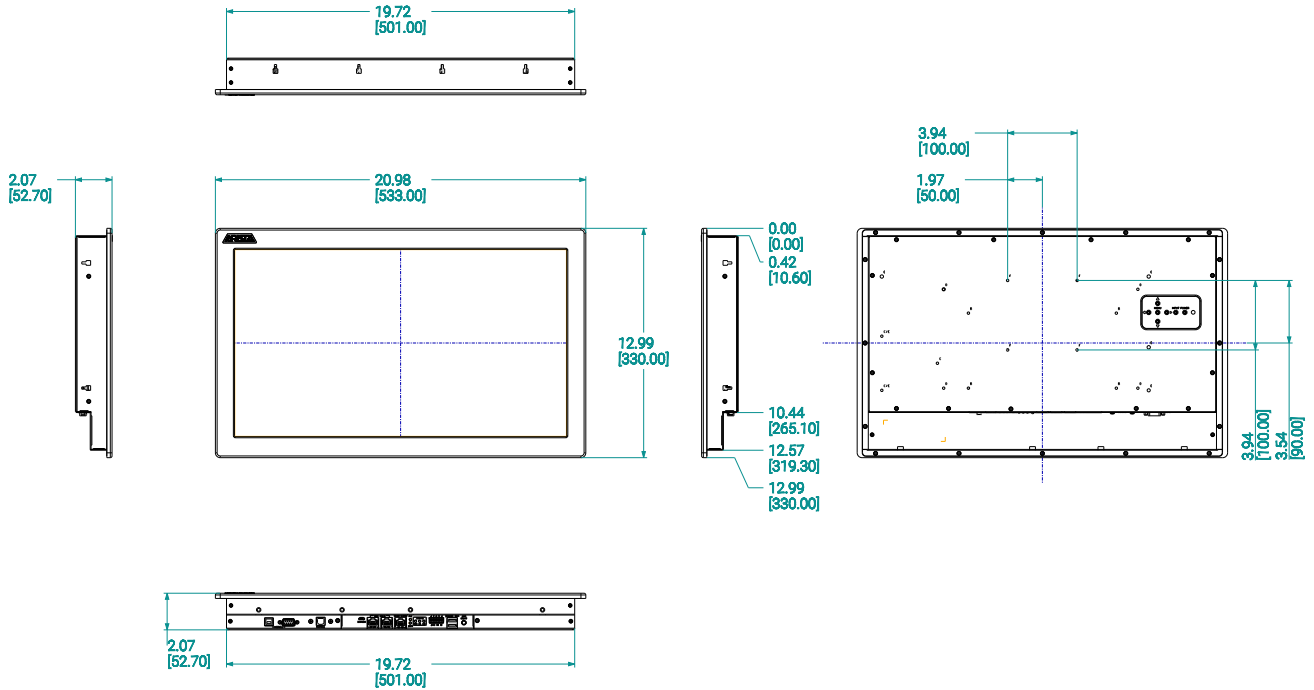

Ordering Information

Item	ADM-1821AP-00A	ADM-1821AP-00E
LCD Display	21.5" LCD / 1920 x 1080	21.5" LCD / 1920 x 1080
Touch Screen	5-Wire	5-Wire
Bezel	Black Powder Coated	Stainless Steel
Power Supply	Powered by Transmitter	Powered by Transmitter