



ADM-2121AP-00A ADM-2121AP-00E

Panel Mount 21.5-inch KVM Extender Integrated LCD Display Monitor

Features


- 21.5" LCD, 1920 x 1080 Resolution
- Flush Bezel Panel Mount Design
- NEMA 4/4X Front Bezel
- Aluminum or Stainless-Steel Bezel
- HDMI Via HDMI Transmitter
- Projected Capacitive Touch
- USB Touch Interface via HDMI Transmitter
- Powered by HDMI Transmitter

Specifications

Model Name	ADM-2121AP-00A / ADM-2121AP-00E
LCD Display	
Display Size (Diagonal)	21.5 inch
Resolution	1920 x 1080
Backlight Lifetime (Hours)	50,000
Visual Characteristics	
Colors	16.7 million
Aspect Ratio	16:9
Viewing Angle (V/H)	178° / 178°
Contrast Ratio	1000 : 1
Brightness	250 nits
Input Interface	
VGA	N/A
DVI	N/A
HDMI	Via HDMI Transmitter
Display Port	N/A
CVBS	N/A
YPbPr	N/A
Touch Screen	
Technology	Projected Capacitive
Interface	USB via HDMI Transmitter
Driver	Win 7, Win10
Front Bezel	
NEMA 4	Aluminum
NEMA 4X	Stainless Steel (Optional)
Power/Thermal Specs	
Power Requirement (Max)	Powered by HDMI Transmitter
Power Consumption (Max)	23 W
Recommended Power Supply	32 W
Heat Dissipation	77 BTU/hr
Physical Information	
Mounting	Panel Mount
Net Weight	20 lbs / 9.07 kg
Dimension (W x H x D)	20.91 x 12.94 x 2.01 inch 531 x 328.8 x 50.95 mm
Recommended Cutout Dimension (WxH)	20.09 x 12.13 inch 510.2 x 308.0 mm
Environmental	
Operating Temperature	0 to 50°C (32 to 122°F)
Storage Temperature	-20 to 60°C (-4 to 140°F)
Relative Humidity	0~95%
IP/NEMA Rating	Bezel meets NEMA 4/4X requirement
Certification	N/A

Dimension Drawing

ADM-2121AP-00A-00E_600A_V2
 Model Name: ADM-2121AP-00A/00E
 Size Unit: inch(mm)

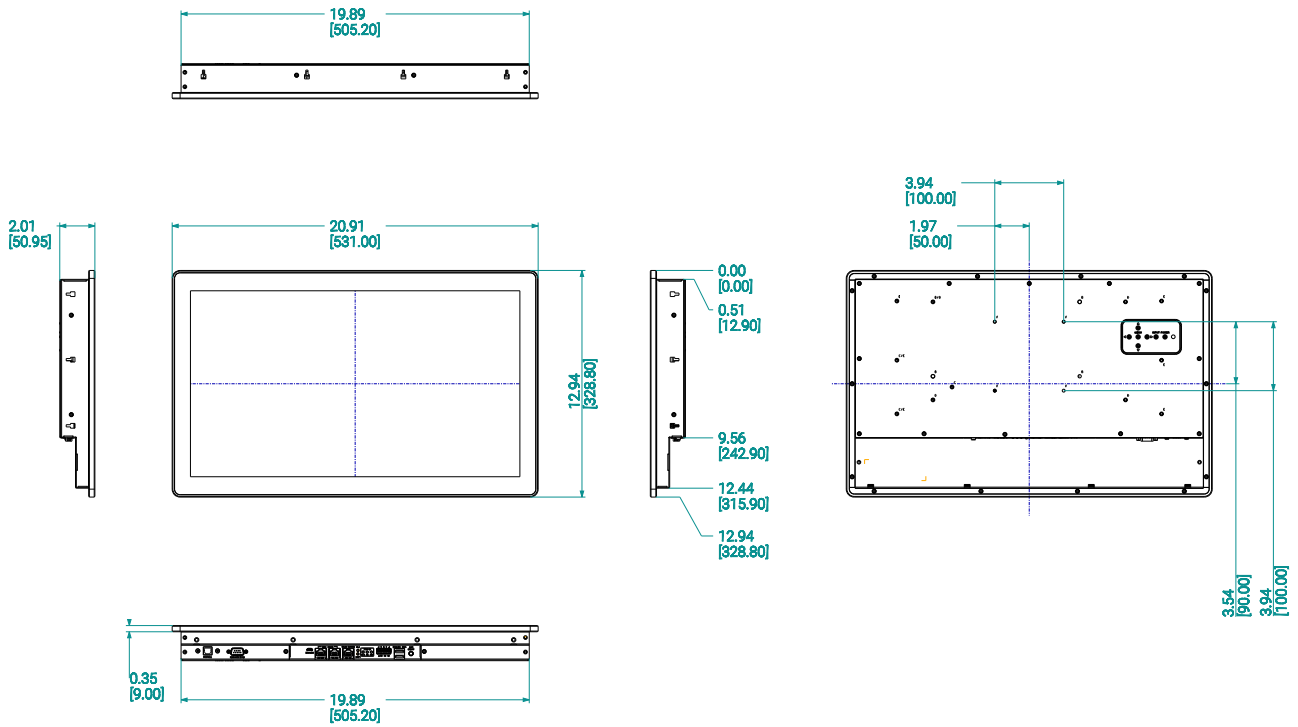

Ordering Information

Item	ADM-2121AP-00A	ADM-2121AP-00E
LCD Display	21.5" LCD / 1920 x 1080	21.5" LCD / 1920 x 1080
Touch Screen	Projected Capacitive	Projected Capacitive
Bezel	Aluminum	Stainless Steel
Power Supply	PoE	PoE
Extender Video Input	HDMI via ARD-1007-A00-TX	HDMI via ARD-1007-A00-TX