




# ARP-3819AP-K01

Panel Mount, 19" PCAP Touch,  
Supports Windows / Ubuntu / ThinManager

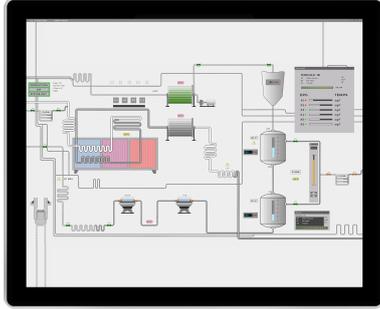

## Features

- 19" LCD, 1280 x 1024 Resolution
- Projected Capacitive Touch Screen
- Aluminum or 316L Stainless Steel Flush Bezel
- Intel N100 / N200 / X7425E / i3-N305 CPU, Up to 16GB DDR4
- Optional 2.5" SSD, M.2 NVMe SSD
- 1 x 2.5G, 1 x 1G Ethernet
- 3 x USB 3.2, 1 x USB 2.0 ports
- Powered by 802.3bt PoE or DC 24V option
- Supports Windows / Ubuntu / ThinManager


Please refer to ordering information for  
the specific configurations for your applications.

## Specifications

Model Name	ARP-3819AP K01
<b>LCD Display</b>	
Display Size (Diagonal)	19.0 inch
Resolution	1280 x 1024
Backlight Lifetime	50,000 hours
<b>Visual Characteristics</b>	
Colors	16.7 million
Aspect Ratio	5:4
Viewing Angle (V/H)	160° / 170°
Contrast Ratio	1000 : 1
Brightness	450 nits (Typical)
<b>Touchscreen</b>	
Technology	Projected Capacitive
Interface	USB
Driver	Windows 10/11, ThinManager USB Touch Module
<b>Front Bezel</b>	
NEMA 4	Black Powder Coated Aluminum
NEMA 4x	316L Stainless Steel (Optional)
<b>System</b>	
CPU	N100 / N200 / X7425E / i3-N305
Chipset	Alder Lake
Memory	Up to 16GB DDR4 SO-DIMM
Video Controller	Intel® UHD Graphics
External Video Output	DP, HDMI
Storage Option	2.5" SSD, NVMe SSD (M.2 2280)
CFast Card	Optional
Keyboard / Mouse	USB
Audio	Line Out, Mic In
Watchdog Timer	Yes
Remote Boot	ThinManager Option
Expansion Slot	M.2 1630
<b>I/O Communication</b>	
USB Port	3 x USB 3.2, 1 x USB 2.0
Serial Port	N/A
IEEE 1394	N/A
LAN	1 x 2.5GB, 1 x Gigabit
Parallel	N/A
GPIO	N/A
<b>Smart Battery</b>	
External Smart Battery	N/A
<b>OS Support</b>	
OS Support	Windows 10/11, Ubuntu, ThinManager
<b>Power/Thermal Specs</b>	
Power Requirement (Max)	DC 24V@2.2A / 802.3bt PoE
Power Consumption (Max)	51W
Recommended Power Supply	75W
Heat Dissipation	174 BTU/hr
<b>Physical Information</b>	
Mounting	Panel mount
Net Weight	18 Lbs / 8.16 Kg
Dimension (W x H x D)	16.85 x 13.9 x 3.33 inch 428 x 353 x 84.5 mm
Recommended Cutout Dimension (WxH)	16.20 x 13.25 inch / 411.4 x 336.4 mm
<b>Environmental</b>	
Operating Temperature	0~50°C (32~122°F)
Storage Temperature	-20~60°C (-4~140°F)
Relative Humidity	0~95%
<b>Compliance</b>	
IP/NEMA Rating	Bezel meets NEMA 4/4X requirement
Certification	--

# Dimension Drawing

ARP-3819AP-K01  
 Size Unit: inch(mm)

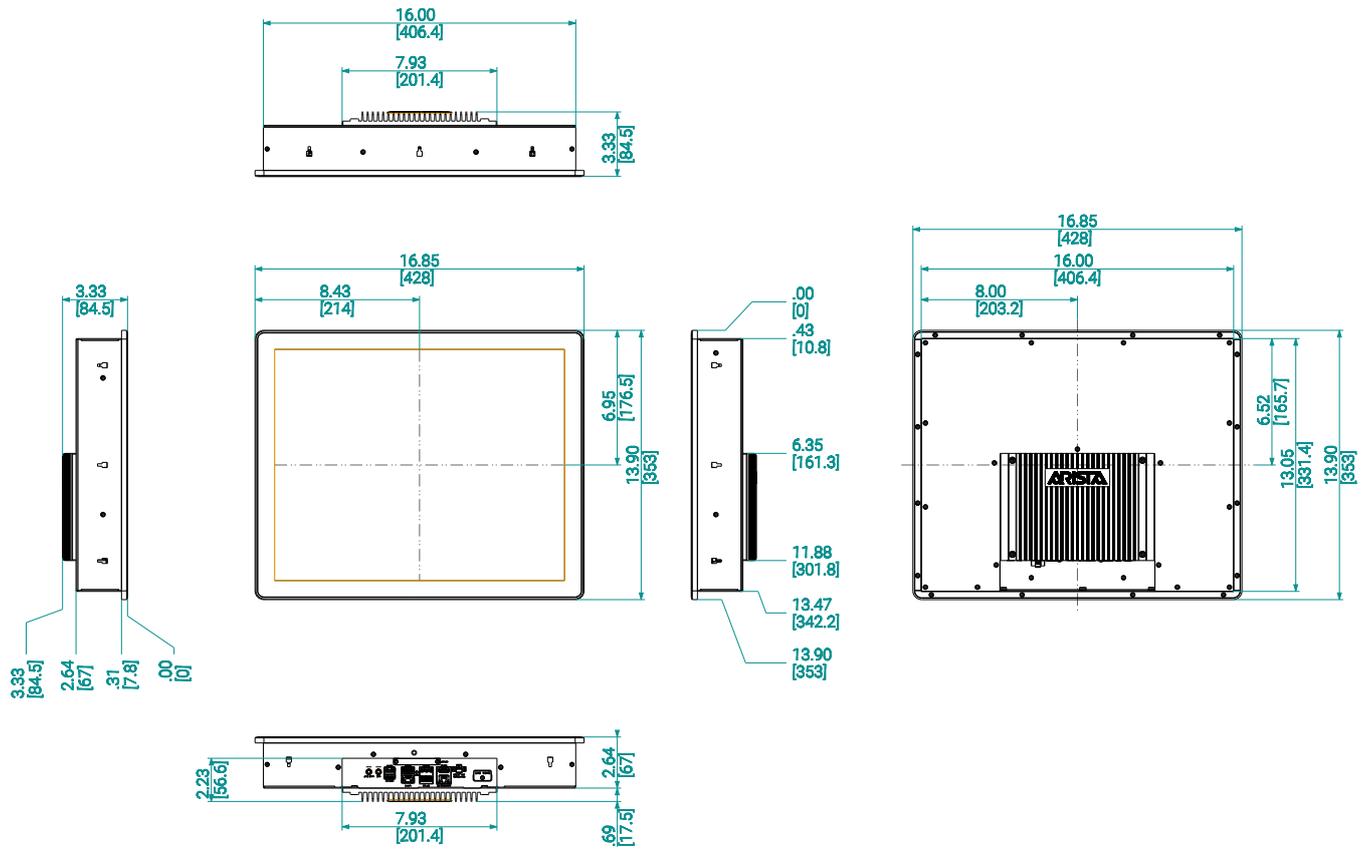

## Ordering Information

### ThinManager Ready / Powered By PoE

Item	ARP-3819AP-K01-A02	ARP-3819AP-K01-A06
LCD Display	19.0" LCD / 1280 x 1024	19.0" LCD / 1280 x 1024
Touch Screen	Projected Capacitive	Projected Capacitive
Bezel	Black Powder Coated Aluminum	316L Stainless Steel
CPU	N100 / N200 / X7425E	N100 / N200 / X7425E
Memory	4GB DDR4	4GB DDR4
Storage	N/A	N/A
Remote Boot	ThinManager Ready	ThinManager Ready
Power Supply	Powered by 802.3bt PoE	Powered by 802.3bt PoE

### ThinManager Ready / Powered By 24V DC

Item	ARP-3819AP-K01-003	ARP-3819AP-K01-007
LCD Display	19.0" LCD / 1280 x 1024	19.0" LCD / 1280 x 1024
Touch Screen	Projected Capacitive	Projected Capacitive
Bezel	Black Powder Coated Aluminum	316L Stainless Steel
CPU	N100 / N200 / X7425E	N100 / N200 / X7425E
Memory	4GB DDR4	4GB DDR4
Storage	N/A	N/A
Remote Boot	ThinManager Ready	ThinManager Ready
Power Supply	DC24V via DIN Rail Power Supply	DC24V via DIN Rail Power Supply

### Windows OS / Powered By PoE

Item	ARP-3819AP-K01-A30-300	ARP-3819AP-K01-A34-300
LCD Display	19.0" LCD / 1280 x 1024	19.0" LCD / 1280 x 1024
Touch Screen	Projected Capacitive	Projected Capacitive
Bezel	Black Powder Coated Aluminum	316L Stainless Steel
CPU	i3-N305	i3-N305
Memory	16GB DDR4	16GB DDR4
Storage	2.5" SATA SSD	2.5" SATA SSD
Remote Boot	N/A	N/A
Power Supply	Powered by 802.3bt PoE	Powered by 802.3bt PoE

### Windows OS / Powered By 24V DC

Item	ARP-3819AP-K01-031-300	ARP-3819AP-K01-035-300
LCD Display	19.0" LCD / 1280 x 1024	19.0" LCD / 1280 x 1024
Touch Screen	Projected Capacitive	Projected Capacitive
Bezel	Black Powder Coated Aluminum	316L Stainless Steel
CPU	i3-N305	i3-N305
Memory	16GB DDR4	16GB DDR4
Storage	2.5" SATA SSD	2.5" SATA SSD
Remote Boot	N/A	N/A
Power Supply	DC24V via DIN Rail Power Supply	DC24V via DIN Rail Power Supply

### ARP-3800AP Series stainless Steel front bezel is made of Stainless Steel 316L and corrosion free against Cleaning Agents and Solvents used in Pharmaceutical industry listed below:

- **Isopropyl alcohol:** Used for cleaning equipment and surfaces due to robust decreasing and disinfection properties.
- **Hydrogen peroxide (50% and 100%):** Used for cleaning and disinfection, as well as the removal of microorganisms in aseptic environments.
- **Acetone:** Used for removing residues insoluble in water. This product is ideal for equipment cleansing.
- **Ethanol:** A common disinfectant frequently used for decontaminating surfaces and equipment.
- **Citric acid:** Used for cleaning stainless steel equipment, removing mineral deposits, and cleansing surfaces.
- **Sodium bicarbonate:** Used for cleaning sensitive surfaces and equipment where more abrasive agents may cause damage.