



ARP-D24AX

Dual NEMA 4X / IP66 Waterproof Panel PC with 24-inch PCAP Touch Screen

Features

- Dual 24" LCD, 1920 x 1080 Resolution
- Projected Capacitive Touch
- Stainless Steel Enclosure
- Meets NEMA 4X / IP66 requirements
- Intel Celeron J1900 @ 1.99GHz / Atom E3845 @ 1.91GHz CPU; Intel i7-6600U CPU
- Up to 4GB DDR3L/ Up to 16GB DDR4 SO-DIMM
- 1x Gigabit Ethernet
- 2x USB 2.0 ports
- Optional 2.5" SSD
- Wi-Fi Connectivity (Optional)
- 110~220VAC

Specifications


Model Name	ARP-D24AX	
	E01	H01
LCD Display		
Display Size	Dual 24 inch	Dual 24 inch
Max Resolution	1920 x 1080	1920 x 1080
Backlight Lifetime	50,000 hours	50,000 hours
Visual Characteristics		
Colors	16.7 million	16.7 million
Aspect Ratio	16:9	16:9
Viewing Angle (V/H)	178° / 178°	178° / 178°
Contrast Ratio	1000 : 1	1000 : 1
Brightness	250 nits	250 nits
Touchscreen		
Technology	Projected Capacitive	Projected Capacitive
Interface	USB	USB
Driver	Windows 7, Windows 10	Windows 7, Windows 10
Enclosure		
NEMA 4	N/A	N/A
NEMA 4x	Stainless Steel	Stainless Steel
System		
CPU	Intel Celeron J1900 @ 1.99GHz / Atom E3845 @ 1.91GHz CPU	3.4 GHz i7-6600U
Chipset	Bay Trail	By CPU
Memory	Up to 4GB DDR3L SO-DIMM	Up to 16GB DDR4 SO-DIMM
Video Controller	Intel Gen7 Intel Graphics DX 11, OGL3.2	Intel HD Graphics 520
External Video Output	N/A	N/A
Storage Option	N/A	2.5" SSD
Compact Flash	N/A	N/A
Keyboard / Mouse	USB	USB
Audio	N/A	N/A
Watchdog Timer	Programmable 1 - 255 sec	Programmable 1 - 255 sec
Remote Boot	ThinManager Ready, PXE	N/A
Expansion Slot	N/A	N/A
I/O Communication		
USB Port	2 x USB 2.0	2 x USB 2.0
Serial Port	N/A	N/A
IEEE 1394	N/A	N/A
LAN	1 x Gigabit	1 x Gigabit
Parallel	N/A	N/A
GPIO	N/A	N/A
Smart Battery		
External Smart Battery	N/A	N/A
OS Support		
OS Support	Windows 7, Windows 10	Windows 7, Windows 10
Power/Thermal Specs		
Power Requirement (Max)	110~220VAC	110~220VAC
Power Consumption (Max)	60 W	68W
Recommended Power Supply	85 W	100W
Heat Dissipation	203 BTU/hr	232 BTU/hr
Physical Information		
Mounting	Pedestal, VESA, Wall mount, Benchtop	Pedestal, VESA, Wall and Ceiling mount, Benchtop
Net Weight	--	--
Dimension (W x H x D)	45.96 x 19.41 x 14.29 inch 1167.4 x 493.1 x 363 mm	45.96 x 19.41 x 14.29 inch 1167.4 x 493.1 x 363 mm
IP/NEMA Rating	Meets NEMA 4X / IP66	Meets NEMA 4X / IP66
Certification	N/A	N/A
Environmental		
Operating Temperature	0~50°C (32~122°F)	0~50°C (32~122°F)
Storage Temperature	-20~60°C (-4~140°F)	-20~60°C (-4~140°F)
Relative Humidity	0~95%	0~95%



Dimension Drawing

ARP-D24AX

Size Unit: inch(mm)

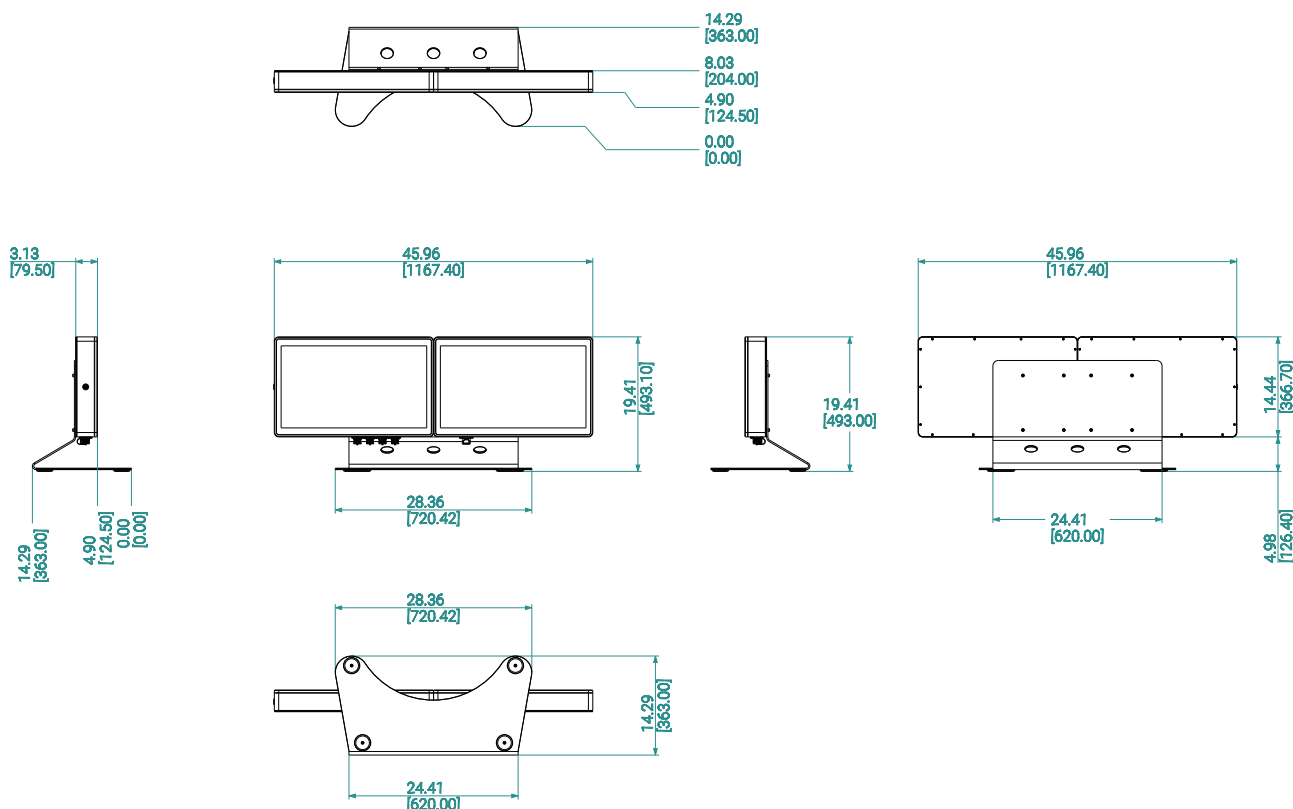

Ordering Information

Item	ARP-D24AX-E01-007
LCD Display	Dual 24" LCD / 1920 x 1080
Touch Screen	Projected Capacitive
Enclosure	Stainless Steel
CPU	Intel Celeron J1900 @ 1.99GHz / Atom E3845 @ 1.91GHz CPU
Memory	4GB DDR3
Storage	N/A
Remote Boot	ThinManager Ready
Power Supply	110~220VAC

Item	ARP-D24AX-H01-035
LCD Display	Dual 24" LCD / 1920 x 1080
Touch Screen	Projected Capacitive
Enclosure	Stainless Steel
CPU	Intel 2.6/3.4 GHz i7-6600U
Memory	16GB DDR4
Storage	2.5" SSD
Remote Boot	N/A
Power Supply	110~220VAC



ARP-D24AX



ARP-D24AX + KB-115A-AX



ARP-D24AX + KB-115A-AX + NFC Reader