



## ARD-1007-A02-RX

HDMI, USB KVM Switch Extension Receiver


### Features

- True one cable 330 feet extension solution
- Decodes 3 to 1 / 4 TO 1 HDMI, USB KVM Switch Signals
- Powered by Transmitter, does not require external power supply

### Specifications


Model Name	ARD-1007-A02-RX
<b>Technical</b>	
Role of Usage	KVM Switch Receiver (RX)
Video Resolution	Up to 3840 x 2160
Extension Media	Cat5e/Cat6 cable up to 330 feet
Decoding Signals	HDMI, USB
<b>I/O Communication</b>	
Input	1 x RJ45 Remote IN (From PSE)
HDMI Out	HDMI female
USB	4x USB Type A
<b>Physical Information</b>	
Mounting	Wall Mount
Dimension (W x H x D)	6.70 x 1.32 x 4.51 inch 170.1 x 33.5 x 114.6 mm
<b>Power/Thermal Specs</b>	
Power supply	Powered by Transmitter over CAT 5e/6 cable
<b>Environmental</b>	
Operation Temperature	0~50°C (32~122°F)
Storage Temperature	-20~60°C (-4~140°F)
Relative Humidity	0~95%

### Connection Diagram

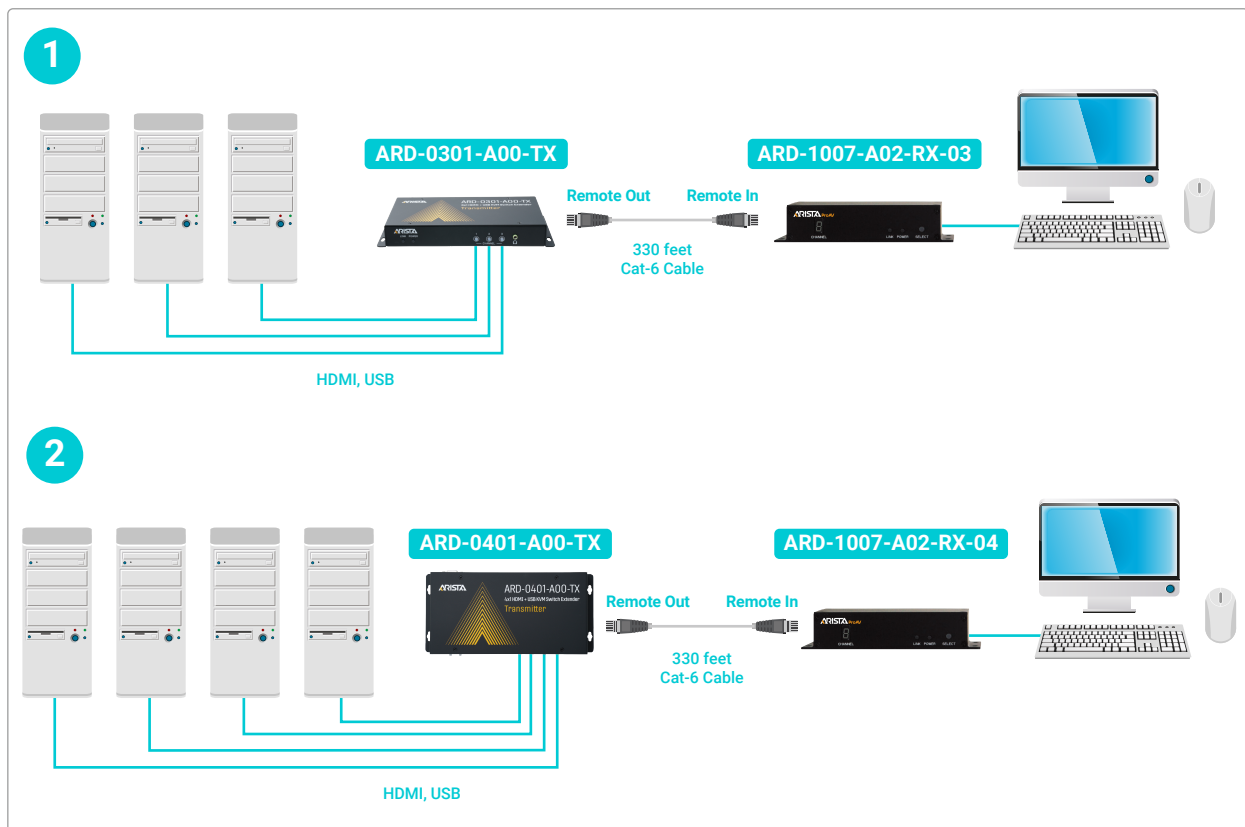

## Dimension Drawing

Model Name: ARD-1007-A02-RX  
Size Unit: inch(mm)

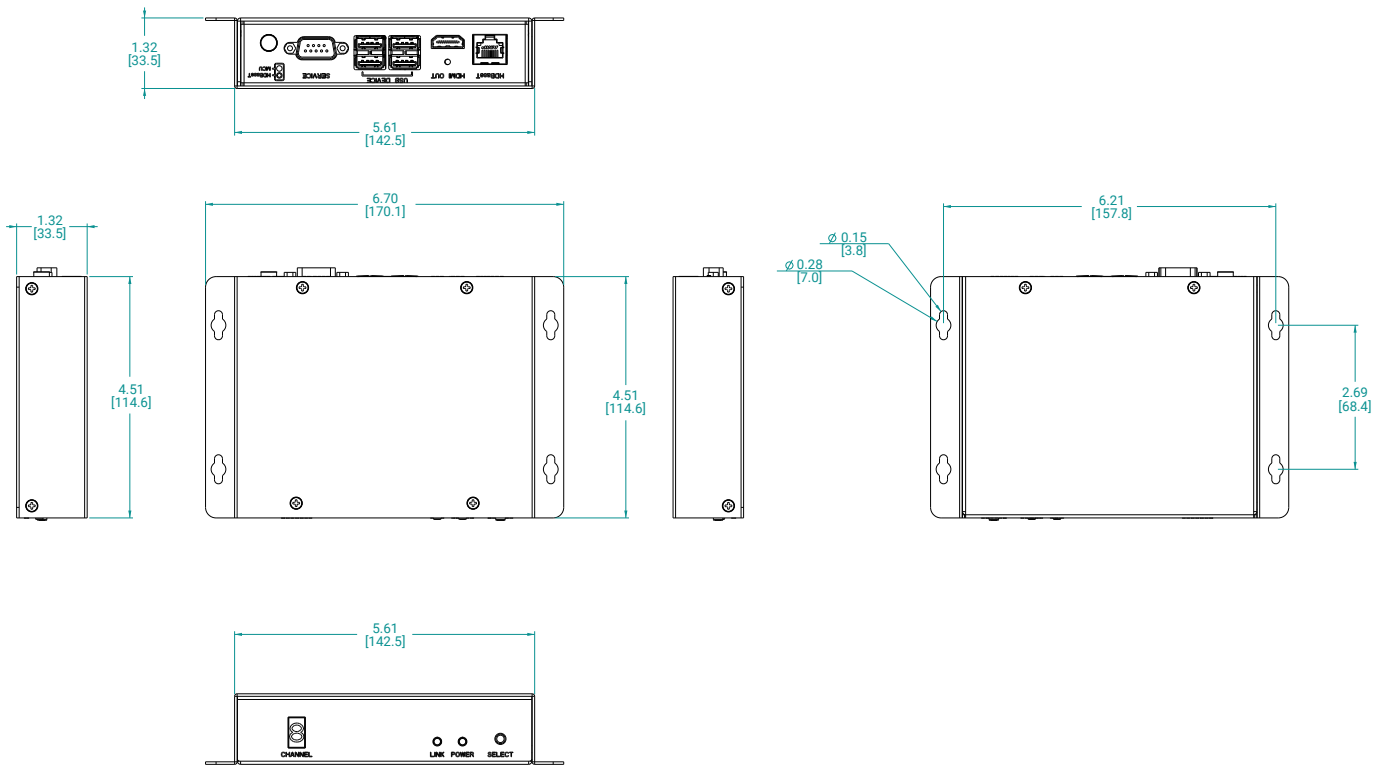

## Ordering Information

### Main Product

ARD-1007-A02-RX-KVM-03 3 to 1 HDMI, USB KVM Switch Extension Receiver

### Companion Products Ordering Information

ARD-0301-A00-TX 3 to 1 HDMI, USB KVM Switch Extension Transmitter

### Main Product

ARD-1007-A02-RX-KVM-04 4 to 1 HDMI, USB KVM Switch Extension Receiver

### Companion Products Ordering Information

ARD-0401-A00-TX 4 to 1 HDMI, USB KVM Switch Extension Transmitter