



## ARD-1007-A00-RX

4K HDMI, USB Decoder / Receiver


### Features

- True one cable 330 feet extension solution
- Decodes HDMI, USB, 10/100 LAN, RS-232, IR signals
- Powered by Transmitter, does not require external power supply
- Provides 12VDC/1A power source

### Specifications


Model Name	ARD-1007-A00-RX
<b>Technical</b>	
Role of Usage	Decoder / Receiver (RX)
Video Resolution	Up to 3840 x 2160
Extension Media	Cat5e/Cat6 cable up to 330 feet
Decoding Signals	HDMI, USB, RS-232, IR, 10/100 Ethernet, Power
<b>I/O Communication</b>	
Input	1 x RJ45 Remote IN (From PSE)
HDMI Out	HDMI female
RS-232	Terminal Block 3 Pin (Tx, Rx, GND)
USB	4x USB Type A
Ethernet Hub	2 x 10/100 LAN
IR	Terminal Block 5-pin
12V DC Output Terminal	12V / 1A Output
<b>Physical Information</b>	
Mounting	Wall mount or DIN-RAIL mount
Dimension (W x H x D)	6.19 x 1.45 x 4.04 inch 157.2 x 36.8 x 102.6 mm
<b>Power/Thermal Specs</b>	
Power supply	Powered by Transmitter over CAT 5e/6 cable
<b>Environmental</b>	
Operation Temperature	0~50°C (32~122°F)
Storage Temperature	-20~60°C (-4~140°F)
Relative Humidity	0~95%

### Connection Diagram

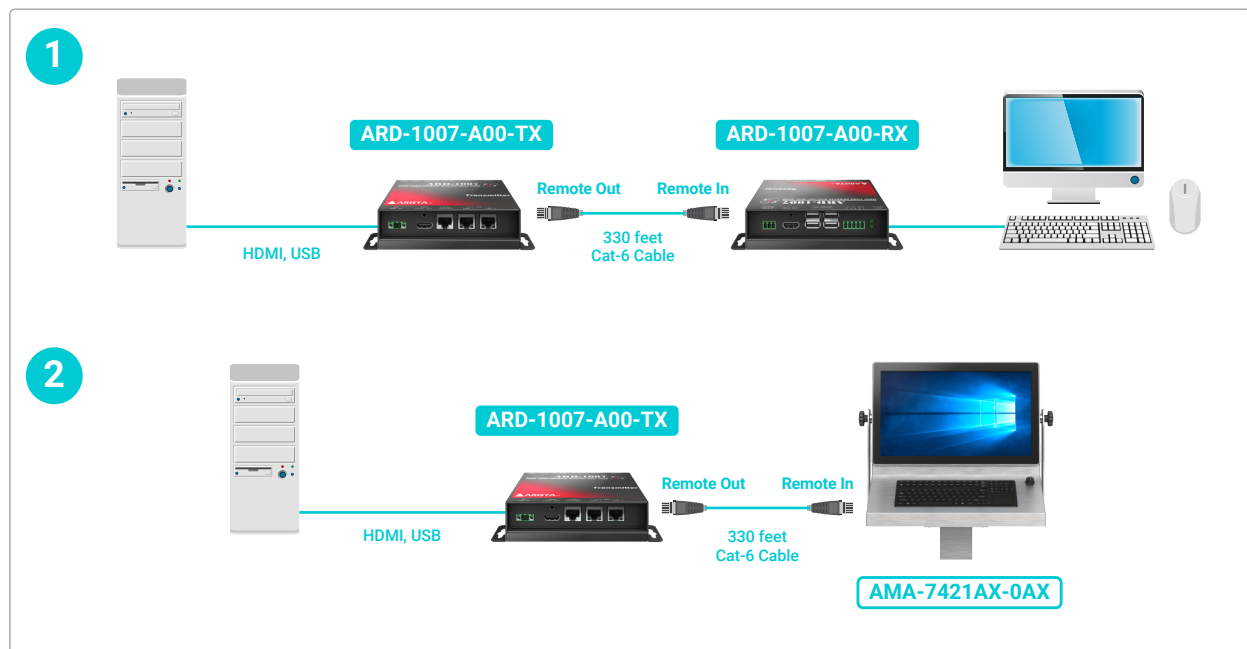

## Dimension Drawing

Model Name: ARD-1007-A00-TX/RX  
 Size Unit: inch(mm)

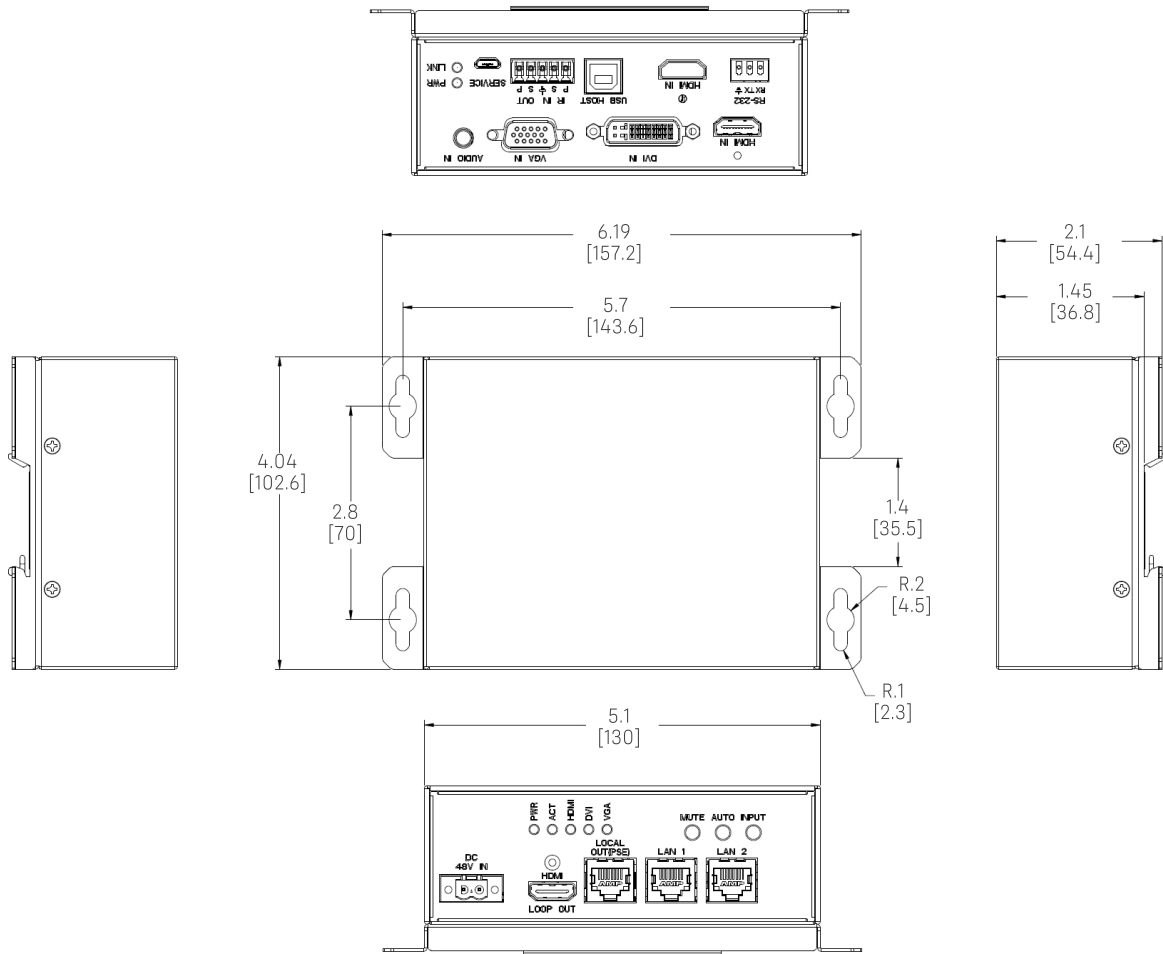

## Ordering Information

### Main Product

ARD-1007-A00-RX

HDMI, USB Extension Receiver

### Companion Products Ordering Information

ARD-1007-A00-TX

HDMI, USB Extension Transmitter